
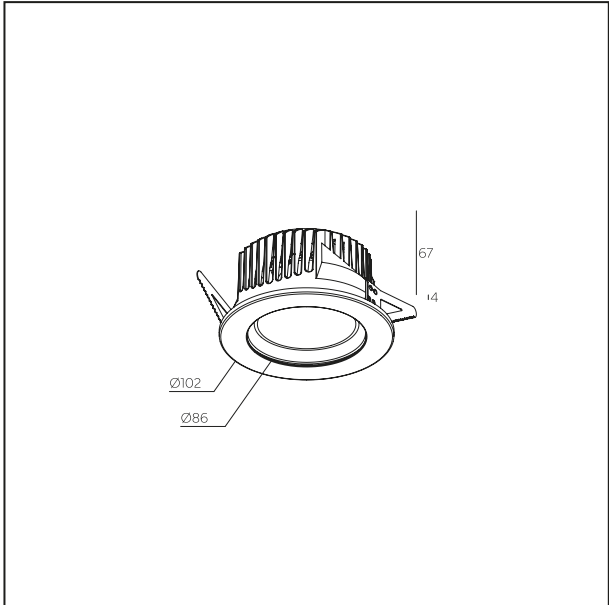


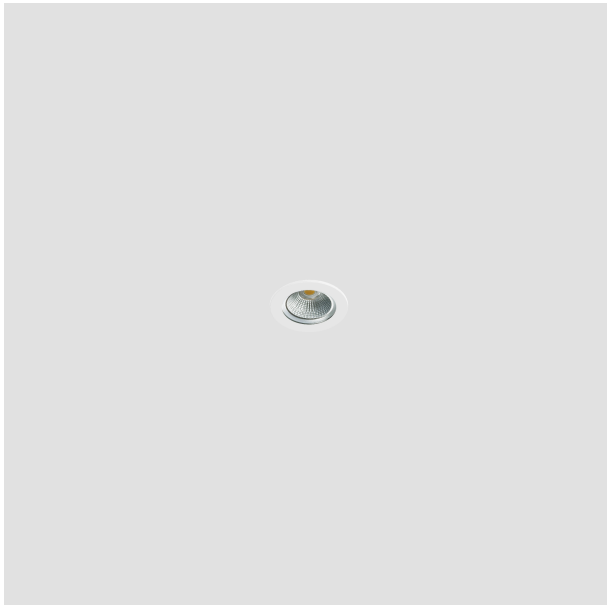

Categoria / Category

Incassi / Downlights

IP20

mA

RG1

Ta  
35°

Specifiche meccaniche / Mechanical specs

|                             |                                                      |
|-----------------------------|------------------------------------------------------|
| Corpo / Body                | Pressofusione di Alluminio / Die-Cast Aluminium Body |
| Ottica / Optic              | Riflettore in Alluminio / Aluminium Reflector        |
| Verniciatura / Finishing    | Verniciatura a Polvere / Powder Painted              |
| Foro incasso / Cutting hole | Ø105 mm                                              |

Specifiche elettriche / Electrical specs

|                                             |                            |
|---------------------------------------------|----------------------------|
| Alimentatore / Driver                       | Non Incluso / Not Included |
| Tensione in ingresso / Input voltage        | 36V CC                     |
| Potenza sorgente / Source power             | 21 W                       |
| Corrente di Alimentazione / Supply current  | 600 mA                     |
| Efficienza / Efficiency                     | 135 lm/W                   |
| Classe energetica / Energy efficiency class | E                          |

**Specifiche illuminotecniche / Illuminotecnical specs**

|                                          |                   |
|------------------------------------------|-------------------|
| Sorgente / <i>Light source</i>           | COB - LES15       |
| SDCM                                     | 3                 |
| IRC / <i>CRI</i>                         | >90               |
| Temperatura colore / <i>CCT</i>          | 3000 K            |
| Flusso nom. / <i>Nom. flux</i>           | 2835 lm           |
| Flusso effettivo / <i>Effective flux</i> | 2255 lm           |
| LOR                                      | 80%               |
| Durata LED / <i>LED lifetime</i>         | L80B20 (@50000hr) |
| Fascio / <i>Beam</i>                     | 30°               |


**Accessori / Accessories**

**Kit di Emergenza Remoto**  
*Remoted Emergency Kit*




123010

**Kit di Emergenza Remoto**  
*Remoted Emergency Kit*



123023-3

**Filtro Opale**  
*Opal Filter*



0796000U