
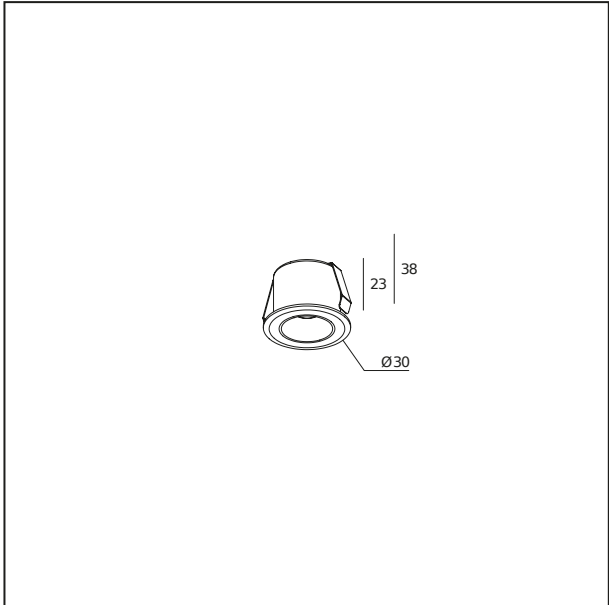


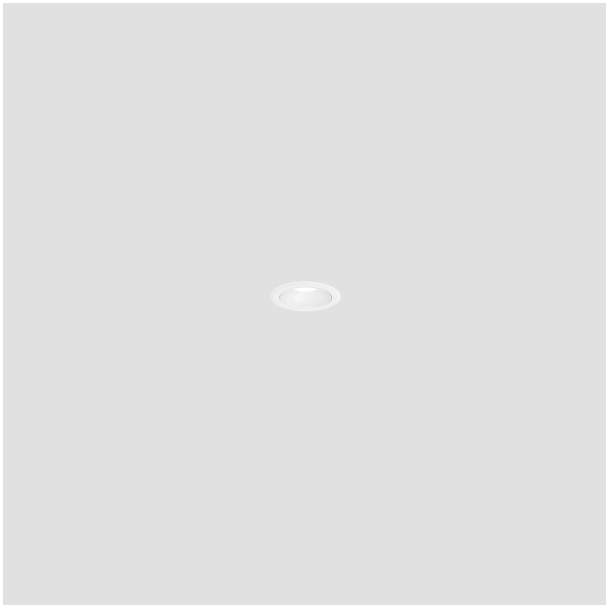

Categoria / Category

Incassi / Downlights

IP40

220/240 V
50/60 Hz

RG1

Ta
35°

Specifiche meccaniche / Mechanical specs

Corpo / Body	Pressofusione di Alluminio / Die-Cast Aluminium Body
Ottica / Optic	Lente TIR in PMMA / PMMA TIR Lens
Verniciatura / Finishing	Verniciatura a Polvere / Powder Painted
Peso / Weight	0,1 kg
Foro incasso / Cutting hole	Ø25 mm

Specifiche elettriche / Electrical specs

Alimentatore / Driver	Incluso / Incluso
Regolazione / Diming	Dimmerabile DALI / DALI Dimmable
Tensione in ingresso / Input voltage	220-240V / 50-60Hz
Potenza sistema / System power	2 W
Potenza sorgente / Source power	1,5 W
Corrente di Alimentazione / Supply current	500 mA
Efficienza / Efficiency	91 lm/W
Classe energetica / Energy efficiency class	F

Specifiche illuminotecniche / *Illuminotecnical specs*

Sorgente / <i>Light source</i>	Scheda LED Custom
SDCM	3
IRC / <i>CRI</i>	>90
Temperatura colore / <i>CCT</i>	3000 K
Flusso nom. / <i>Nom. flux</i>	137 lm
Flusso effettivo / <i>Effective flux</i>	112 lm
LOR	82%
Durata LED / <i>LED lifetime</i>	L80B20 (@50000hr)
Fascio / <i>Beam</i>	45°



Accessori / *Accessories*

Alimentatore On-Off / Push
per Collegamenti in Serie (2 -
11 pz)
*On-Off / Push Driver for In
Series Connection (2 - 11 pcs)*



125400

Alimentatore Casambi per
Collegamenti in Serie (2 - 11
pz)
*Casambi Driver for In Series
Connection (2 - 11 pcs)*



127630

Alimentatore DALI per
Collegamenti in Serie (2 - 11
pz)
*DALI Driver for In Series
Connection (2 - 11 pcs)*



151403