



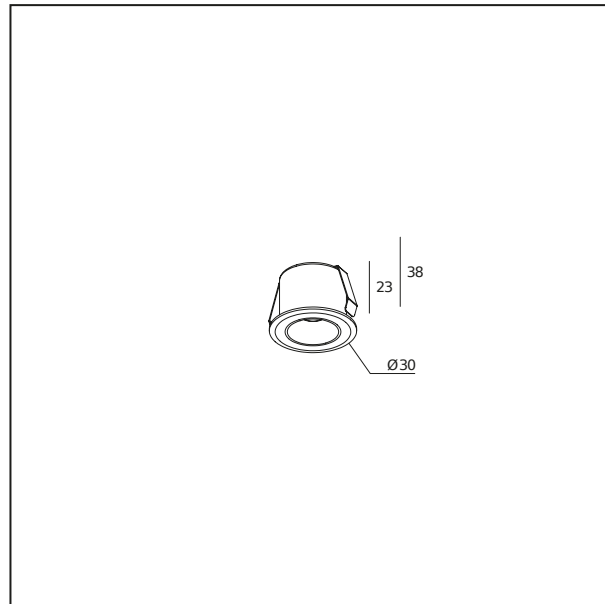

Categoria / Category

Incassi / Downlights

IP40

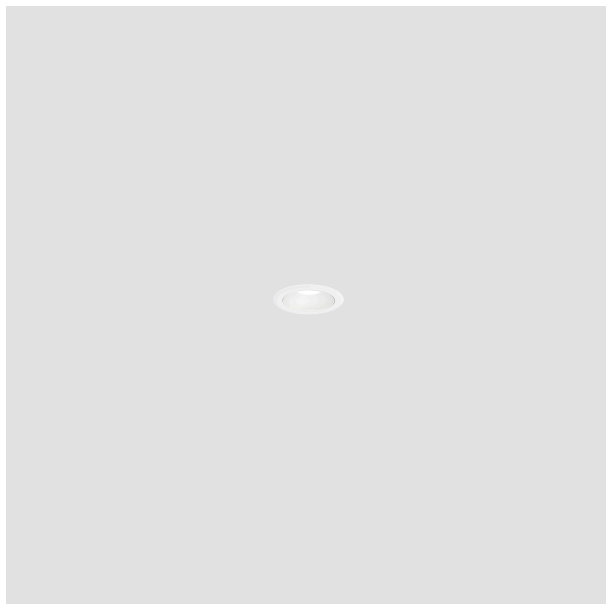

220/240 V
50/60 Hz

RG1

CE

Ta
35°

Specifiche meccaniche / Mechanical specs

Corpo / Body

Pressofusione di Alluminio / Die-Cast Aluminium Body

Ottica / Optic

Lente TIR in PMMA / PMMA TIR Lens

Verniciatura / Finishing

Verniciatura a Polvere / Powder Painted

Peso / Weight

0,1 kg

Foro incasso / Cutting hole

Ø25 mm

Specifiche elettriche / Electrical specs

Alimentatore / Driver

Incluso / Included

Regolazione / Dimming

Dimmerabile DALI / DALI Dimmable

Tensione in ingresso / Input voltage

220-240V / 50-60Hz

Potenza sistema / System power

2 W

Potenza sorgente / Source power

1,5 W

Corrente di Alimentazione / Supply current

500 mA

Efficienza / Efficiency

96 lm/W

Classe energetica / Energy efficiency class

F


Specifiche illuminotecniche / *Illuminotecnical specs*

Sorgente / <i>Light source</i>	Scheda LED Custom
SDCM	3
IRC / <i>CRI</i>	>90
Temperatura colore / <i>CCT</i>	4000 K
Flusso nom. / <i>Nom. flux</i>	144 lm
Flusso effettivo / <i>Effective flux</i>	117 lm
LOR	82%
Durata LED / <i>LED lifetime</i>	L80B20 (@50000hr)
Fascio / <i>Beam</i>	15°




Accessori / *Accessories*

Alimentatore On-Off / Push
per Collegamenti in Serie (2 -
11 pz)
*On-Off / Push Driver for In
Series Connection (2 - 11 pcs)*



125400

Alimentatore Casambi per
Collegamenti in Serie (2 - 11
pz)
*Casambi Driver for In Series
Connection (2 - 11 pcs)*



127630

Alimentatore DALI per
Collegamenti in Serie (2 - 11
pz)
*DALI Driver for In Series
Connection (2 - 11 pcs)*



151403