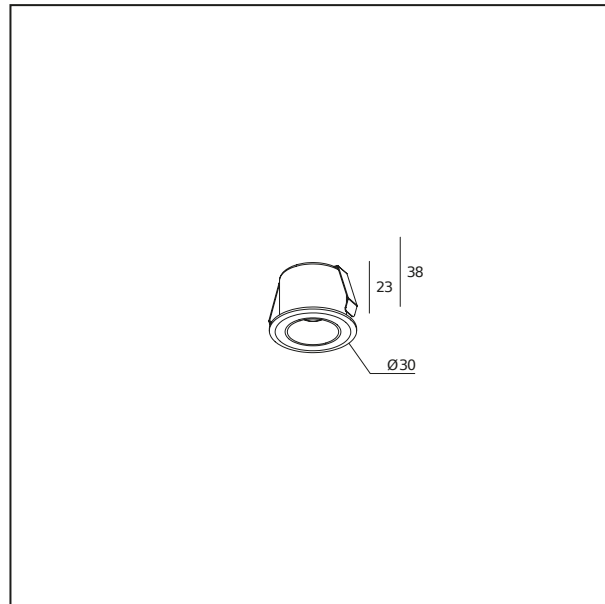
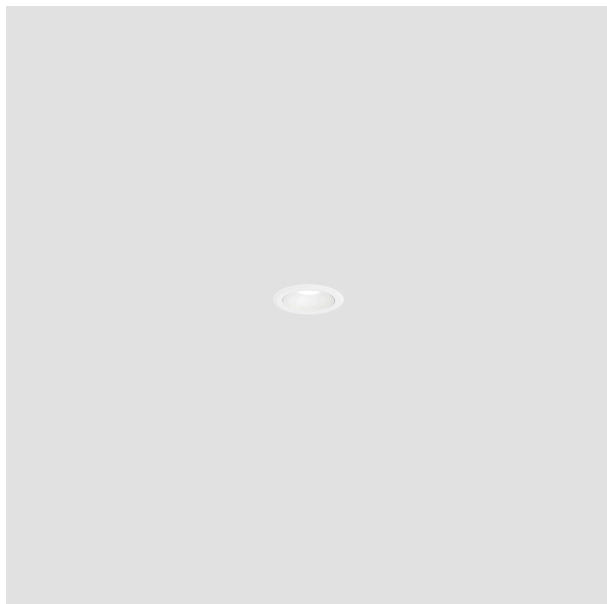



Categoria / Category
Incassi / Downlights
IP40

**220/240 V
50/60 Hz**
RG1

**Ta
35°**

Specifiche meccaniche / *Mechanical specs*

Corpo / Body
Pressofusione di Alluminio / Die-Cast Aluminium Body
Ottica / Optic
Lente TIR in PMMA / PMMA TIR Lens
Verniciatura / Finishing
Verniciatura a Polvere / Powder Painted
Peso / Weight
0,1 kg
Foro incasso / Cutting hole
Ø25 mm

Specifiche elettriche / *Electrical specs*

Alimentatore / Driver
Incluso / Incluso
Regolazione / Diming
Dimmerabile Push / Push Dimmable
Tensione in ingresso / Input voltage
220-240V / 50-60Hz
Potenza sistema / System power
2 W
Potenza sorgente / Source power
1,5 W
Corrente di Alimentazione / Supply current
500 mA
Efficienza / Efficiency
86 lm/W
Classe energetica / Energy efficiency class
F


Specifiche illuminotecniche / *Illuminotecnical specs*

Sorgente / <i>Light source</i>	Scheda LED Custom
SDCM	3
IRC / <i>CRI</i>	>90
Temperatura colore / <i>CCT</i>	2700 K
Flusso nom. / <i>Nom. flux</i>	130 lm
Flusso effettivo / <i>Effective flux</i>	106 lm
LOR	82%
Durata LED / <i>LED lifetime</i>	L80B20 (@50000hr)
Fascio / <i>Beam</i>	15°




Accessori / *Accessories*

Alimentatore On-Off / Push
per Collegamenti in Serie (2 -
11 pz)
*On-Off / Push Driver for In
Series Connection (2 - 11 pcs)*



125400

Alimentatore Casambi per
Collegamenti in Serie (2 - 11
pz)
*Casambi Driver for In Series
Connection (2 - 11 pcs)*



127630

Alimentatore DALI per
Collegamenti in Serie (2 - 11
pz)
*DALI Driver for In Series
Connection (2 - 11 pcs)*



151403