



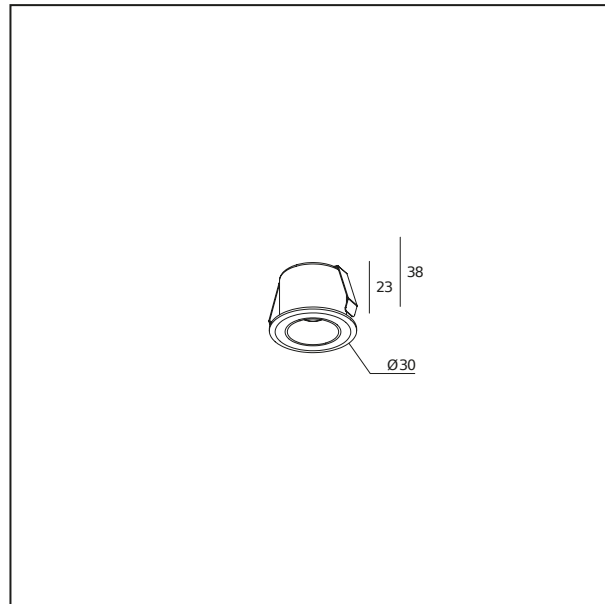

Categoria / Category

Incassi / Downlights

IP40

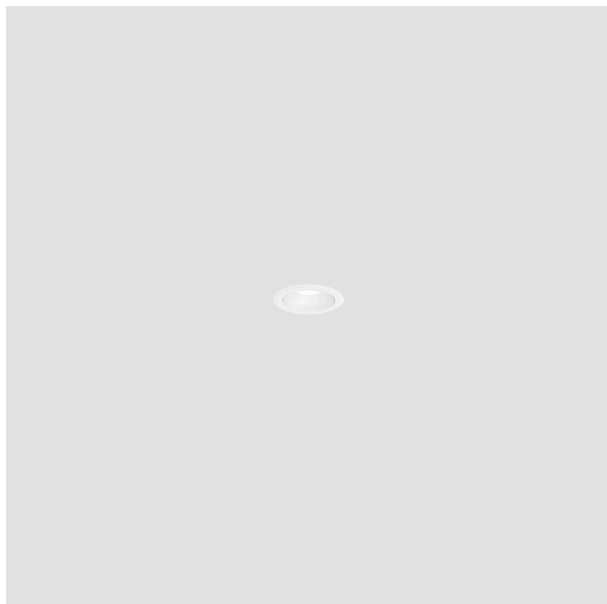

220/240 V  
50/60 Hz

RG1

CE

Ta  
35°

## Specifiche meccaniche / Mechanical specs

Corpo / Body

Pressofusione di Alluminio / Die-Cast Aluminium Body

Ottica / Optic

Lente TIR in PMMA / PMMA TIR Lens

Verniciatura / Finishing

Verniciatura a Polvere / Powder Painted

Peso / Weight

0,1 kg

Foro incasso / Cutting hole

Ø25 mm

## Specifiche elettriche / Electrical specs

Alimentatore / Driver

Incluso / Included

Regolazione / Dimming

Dimmerabile Push / Push Dimmable

Tensione in ingresso / Input voltage

220-240V / 50-60Hz

Potenza sistema / System power

2 W

Potenza sorgente / Source power

1,5 W

Corrente di Alimentazione / Supply current

500 mA

Efficienza / Efficiency

86 lm/W

Classe energetica / Energy efficiency class

F

Specifiche illuminotecniche / *Illuminotecnical specs*

|                                          |                   |
|------------------------------------------|-------------------|
| Sorgente / <i>Light source</i>           | Scheda LED Custom |
| SDCM                                     | 3                 |
| IRC / <i>CRI</i>                         | >90               |
| Temperatura colore / <i>CCT</i>          | 2700 K            |
| Flusso nom. / <i>Nom. flux</i>           | 130 lm            |
| Flusso effettivo / <i>Effective flux</i> | 106 lm            |
| LOR                                      | 82%               |
| Durata LED / <i>LED lifetime</i>         | L80B20 (@50000hr) |
| Fascio / <i>Beam</i>                     | 24°               |



Accessori / *Accessories*

Alimentatore On-Off / Push  
per Collegamenti in Serie (2 -  
11 pz)  
*On-Off / Push Driver for In  
Series Connection (2 - 11 pcs)*



125400

Alimentatore Casambi per  
Collegamenti in Serie (2 - 11  
pz)  
*Casambi Driver for In Series  
Connection (2 - 11 pcs)*



127630

Alimentatore DALI per  
Collegamenti in Serie (2 - 11  
pz)  
*DALI Driver for In Series  
Connection (2 - 11 pcs)*



151403